



Rollenkette / Rollerchains


Type			06	08	10	12	16	20	24	28	32
DIN 8187			$\frac{3}{8} \times \frac{7}{32}$ "	$\frac{1}{2} \times \frac{5}{16}$ "	$\frac{5}{8} \times \frac{3}{8}$ "	$\frac{3}{4} \times \frac{7}{16}$ "	1"x17,02mm	$1\frac{1}{4} \times \frac{3}{4}$ "	$1\frac{1}{2} \times 1$ "	$1\frac{3}{4} \times 1\frac{1}{4}$ "	$2 \times 1\frac{1}{4}$ "
Teilung	pitch	p	9,53	12,78	15,88	19,05	25,40	31,75	38,10	44,45	50,80
Lichte Weite	inner width	b ₁	5,72	7,75	9,65	11,68	17,02	19,56	25,40	30,99	30,99
Rollen Ø	roller Ø	d1	6,35	8,51	10,16	12,07	15,88	19,05	25,40	27,94	29,21

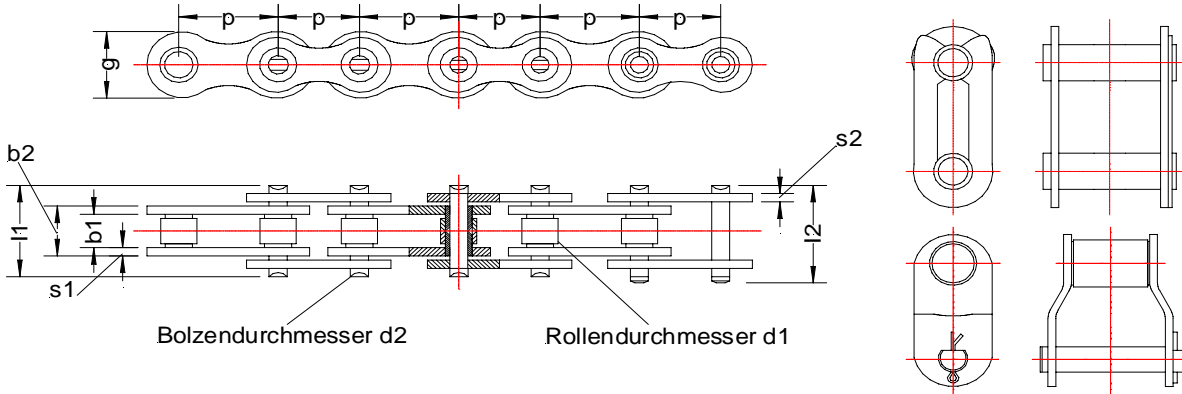

			06 B1	08 B1	10 B1	12 B1	16 B1	20 B1	24 B1	28 B1	32 B1
Bruchlast	tensile strength	kN	8,90	17,80	22,20	28,90	60,00	95,00	160,00	200,00	250,00
Gewicht	weight	kg / m	0,41	0,70	0,95	1,25	2,70	3,60	6,70	8,30	10,50

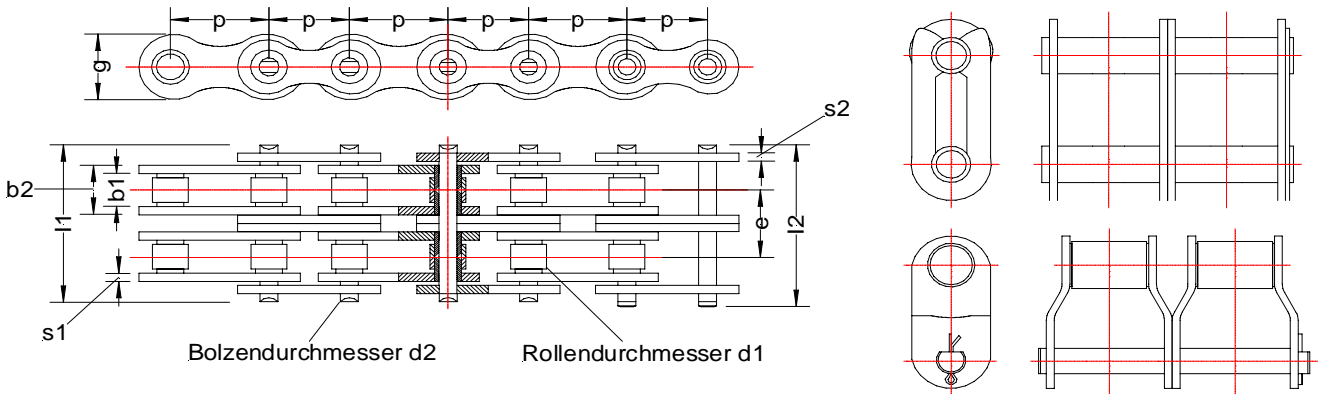

			06 B2	08 B2	10 B2	12 B2	16 B2	20 B2	24 B2	28 B2	32 B2
Bruchlast	tensile strength	kN	16,90	31,10	44,50	57,80	106,00	170,00	280,00	360,00	450,00
Gewicht	weight	kg / m	0,78	1,35	1,85	2,40	5,40	7,20	13,40	18,00	19,00

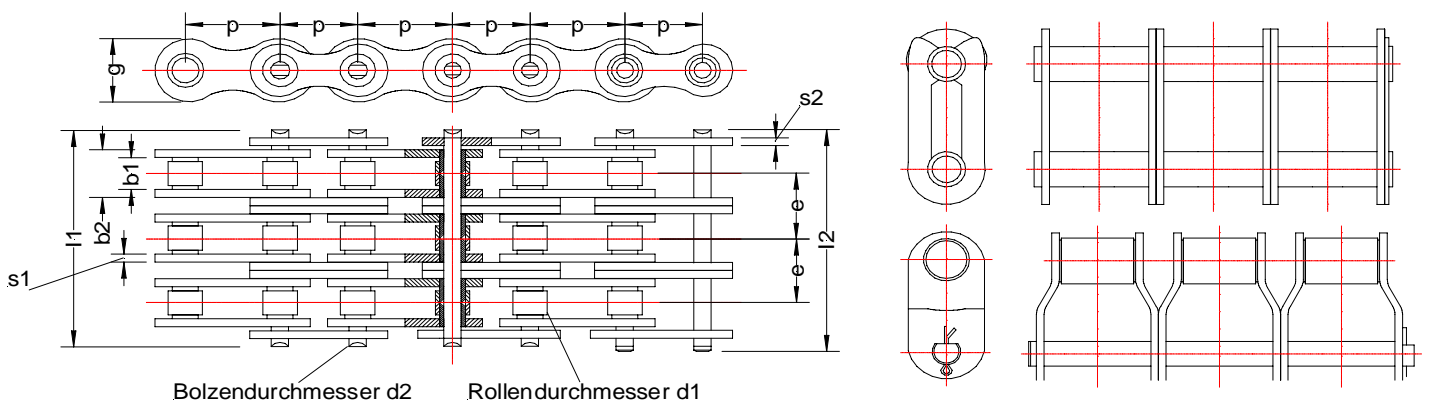

			06 B3	08 B3	10 B3	12 B3	16 B3	20 B3	24 B3	28 B3	32 B3
Bruchlast	tensile strength	kN	24,9	44,5	66,7	86,7	160	250	425	530	670
Gewicht	weight	kg / m	1,20	2,00	2,80	3,80	7,70	11,20	20,70	27,00	28,30